


Choose the 300 Series Top Heat Laminators for Overlamination Mounting Board pre-coating



Integrated rear rewind for roll-to-roll applications

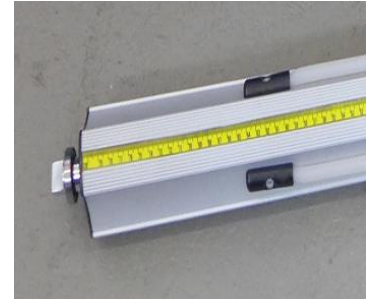

Aluminum Quick-grip shafts for easy loading and alignment

Applications

Signs
Banners
Trade show displays
Point-of-purchase displays
Dry-erase boards
Floor graphics
Graphic mounting
Photo mounting
Window graphics
Vehicle graphics

Specifications

	355TH	363TH
Laminating Width	55"	63"
Roller diameter	5"	5"
Roller gap	1"	1"
Rear rewind	Included	Included
Max temperature	122° F	122° F
Laminating speed	20 ft/min	20 ft/min
Unwinds	Top/Bottom	Top/Bottom
Liner rewind	Chain drive	Chain drive
Pressure adjustment	Hand wheel	Hand wheel
Tension adjustment	Single knob	Single knob
Heat method	Metal Alloy	Metal Alloy
Max. Roll diameter	6" OD	6" OD
Power supply	120v 12a	120v 13a
Power consumption	1200 W	1400 W
Foot pedal	Included	Included
Stand with casters	Included	Included
Net weight w/ stand	321 lbs	376 lbs
Dimensions	72" x 23.5" x 48.5"	80" x 23" x 48"
Shipping weight machine	436 lbs	507 lbs
Shipping dim. machine	79" x 26" x 31"	87" x 26" x 31"
Safety agency approval	cTUVus	cTUVus



The Profitable Source for Finishing Products

Phone: 800.260.0839

Email: info@azon.com